

WOOD PUTTY WP-7

Fix Surface Defect

WOOD PUTTY WP-7 is a ready mixed, general use putty formulated to meet the specific requirements of the wood industry for filing cracks, joints and to level up uneven rough surfaces. It is very easy to apply.

WOOD PUTTY WP-7 possess excellent performances in properties such as adhesion, water resistant and hardness.

- ✓ **Excellent Water Resistant**
- ✓ **Excellent Anti Shrinking**
- ✓ **Low Odour and Low VOC**
- ✓ **Easy Application**
- ✓ **Fast Dry Time**

APPLICATION

1. Ensure surfaces are clean, dry and well bound.
2. Apply with stainless steel putty knife, trowel or spatula.
3. Sand with sand paper to smoothen the surface.

STORAGE


Store putty in cool dry place and away from heat. Close the lid tightly after use to avoid putty self-hardening.

PACKAGING

0.5kg, 1kg, 1.5kg, 9kg, 30kg and 300kg

SPECIFICATIONS

Appearance	: Semi solid
Colour	: Various wood color (Colour can be formulated based on customer requirement)
Odour	: Odourless
pH @ 30°C	: 7.0 - 10.0
Solid Content	: 75% - 85%
Bulk Density	: 1.5 - 2.5g/ml
Drying Time	: Surface Dry - 5 minutes @ 40°C
(Depend on defect)	: Hard Dry - 30 minutes @ 40°C
Diluting Agent	: Clean Water, maximum up to 2%
Remarks	: The putty is manufactured for ready to use purpose. Do not over dilute with water. This may affect the quality of the product.

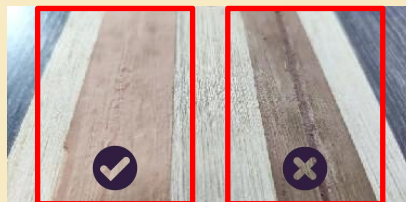

Water resistant